


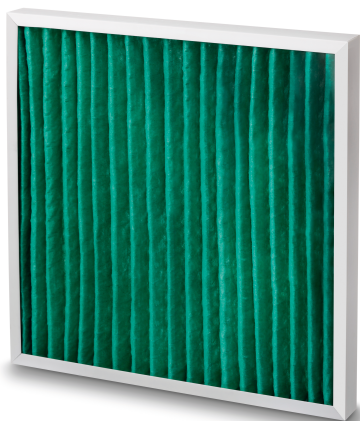

Advantages

- Low pressure drop media resulting in low energy costs
- Incinerable plastic frame for increased robustness and water resistance
- Robust construction for reliable operation

Application: Pre filter for comfort air conditioning applications

Type: Pleated Panel

Frame: ABS

Media: Cotton/Synthetic

Dimensions: Filter front dimensions according EN 15805

Rec. final pressure drop acc. EN 13053: 150 Pa

Maximum airflow: 1,1 x nominal flow

Temperature max: 70°C

RH. max: 100%

Mounting/Frames: Front and side access housings and frames are available

Type	EN779	ISO16890	Dimensions WxHxD (mm)	Air Flow/pressure drop (m³/h/Pa)	Media area (m²)	Weight (kg)
Green	G4	Coarse 65%	592x592x96	3400/45	2,3	1,4
Green	G4	Coarse 65%	287x592x96	1700/45	1,1	0,7
Green	G4	Coarse 65%	610x610x96	3600/45	2,4	1,5
Green	G4	Coarse 65%	305x610x96	1800/45	1,2	0,7
Green	G4	Coarse 65%	592x592x48	3400/55	1,2	0,7
Green	G4	Coarse 65%	287x592x48	1700/55	0,6	0,3
Green	G4	Coarse 65%	610x610x48	3600/55	1,3	0,7
Green	G4	Coarse 65%	305x610x48	1800/55	0,6	0,4
Green	G4	Coarse 65%	492x492x48	2400/55	0,8	0,5
Green "Rooftop"	G4	Coarse 65%	500x500x48	2425/55	0,8	0,5
Green "Rooftop"	G4	Coarse 65%	400x500x48	1940/55	0,7	0,4
Green "Rooftop"	G4	Coarse 65%	500x625x48	3030/55	1	0,6
Green "Rooftop"	G4	Coarse 65%	400x625x48	2425/55	0,9	0,5

Other dimensions are available on request - All dimensions are nominal